

TVT

Secure The World With You

www.tvt.net.cn



TD-9821E2

2 MP Network Camera

TVT

TVT DIGITAL TECHNOLOGY CO., LTD.

Address: 5F, North Block, CE Lighting House, Hi-Tech Park, Nanshan District, Shenzhen, Guangdong Province, P.R.China 518057


Tel: +86-755-3330 6001

Fax: +86-755-3330 6002

Web site: www.tvt.net.cn

E-mail: overseas@tvt.net.cn


2 MP Network Camera



Features

- 2MP (1920 × 1080) full real time coding
- Max. resolution: 1920 × 1080
- Support H.265, H.264 and MJPEG encoding
- Support Micro SD card local image / video storage, alarm pre-recording, auto recycle writing, auto uploading and breakpoint resuming
- Support BLC, HLC, true WDR and image flip
- Support three streams
- Support corridor mode / digital image stabilization / privacy mask / scene mode setting
- Support ROI coding

Dimensions

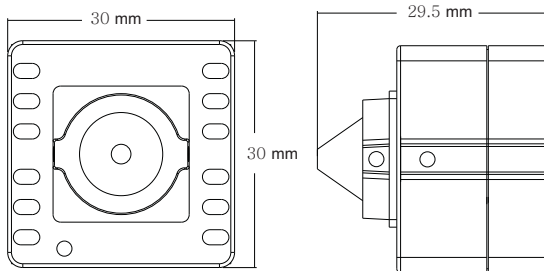

Specifications

Specifications	Model	TD-9821E2
Camera		
Image Sensor		1 / 3 "CMOS
Image Size		1920 × 1080
Iris		Fixed iris
Min. Illumination		Color: 0.1 Lux@F1.2; B / W: 0.01 Lux@F1.2
Lens		4.3 mm HD pinhole lens
Day & Night		Yes
Wide Dynamic Range		120dB
Digital NR		3D DNR
BLC		Yes
HLC		Yes
Angle Adjustment		Adjusted by its support
Image		
Video Compression		H.265 / H.264 / MJPEG
H.264 Compression Standard		Baseline Profile / Main Profile / High Profile
Resolution		1080P (1920×1080), 720P (1280×720), D1
Multi-stream Frame Rates		1080P (1 ~ 30fps) / 720P (1 ~ 30fps) / D1 (1 ~ 30fps)
Bit Rate		32 Kbps ~ 16 Mbps
Encode Mode		VBR / CBR
Quality		Five levels under VBR; Freely adjustable under CBR
Image Settings		ROI, Saturation, Brightness, Chroma, Contrast, Wide Dynamic, Sharpen, NR, etc. adjustable through client software or web browser
ROI		Yes
Interfaces		
Network		RJ45
Audio		One built-in microphone
Video Output		1Vp-p Composite(Output 75Ω/BNC)
Storage Card		Up to 128GB
Functions		
Remote Monitoring		IE browsing, CMS remote control
Online Connection		Support simultaneous monitoring for up to 4 users; Support multi-stream real time transmission
Network Protocol		TCP / IP, UDP, DHCP, NTP, RTSP, PPPoE, DDNS, SMTP, FTP
Interface Protocol		ONVIF, GB-T/28181-2011
Image Snapping		JPEG encoding; image quality adjustable
Others		
Power Supply		DC12V
Power Consumption		<3.5W
Operating Environment		- 20 °C ~ 50 °C, 10 % ~ 90 % humidity
Dimensions (mm)		30 × 30 × 29.5
Weight (net)		97g
Installation		Hung by the wall or installed with its support

Available Model

Available Model	TD-9821E2 (D)
-----------------	-----------------