


CAMERA

TD-9482S3

8MP IR Water-proof Bullet Network Camera



- 8MP (3840 × 2160) H.265 coding
- Max.resolution: 3840 × 2160
- ICR auto switch, true day / night, ROI coding
- 3D DNR, WDR, HLC, BLC, defog
- 30~50m IR night view distance
- DC12V/PoE power supply
- P2P function optional
- IP 67 ingress protection
- Support three streams
- Support mobile surveillance by smart phones with iOS or Android OS
- Intelligent analytics

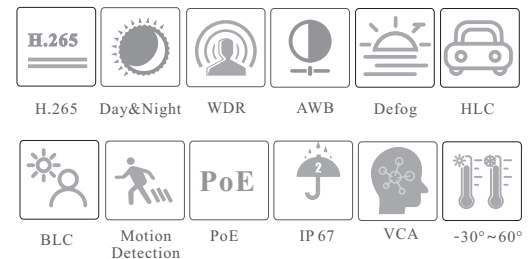

en.tvt.net.cn

For more information, please visit our website

Shenzhen TVT DIGITAL TECHNOLOGY CO., LTD.

Address: 23rd Floor, Block B4, Building NO.9, Shenzhen Bay Eco-Technology Park, Nanshan District, Shenzhen, Guangdong Province, P.R.China

Tel: +86-755-36995888

Web site: <http://en.tvt.net.cn>

Fax: +86-755-33104777

E-mail: overseas@tvt.net.cn


SPECIFICATIONS

Specifications	Model	TD-9482S3
Camera		
Image Sensor	1 / 2.7 "CMOS	
Image Size	3840 × 2160	
Electronic Shutter	1 s ~ 1 / 100000 s	
Iris Type	Fixed Iris	
Min. Illumination	0.11 lux @F2.2, AGC ON; 0 lux with IR 0.032 lux @ F1.2, AGC ON; 0 lux with IR	
Lens	2.8 mm @F2.0, Horizontal FoV:112°; Vertical FoV:79°; Diagonal FoV:118.6° 3.6 mm @F2.2, Horizontal FoV: 89°; Vertical FoV:57.8°; Diagonal FoV:96.8°	2.8~12mm@F1.4, Horizontal FoV: 102.7°~32.2°; Vertical FoV:70.2°~ 18.5°; Diagonal FoV:110.2°~36.7°
Focus	Fixed	Motorized
Lens Mount	M12	Φ14
Wide Dynamic Range	Digital WDR	
BLC	Yes	
HLC	Yes	
Defog	Yes	
Digital NR	3D DNR	
Angle Adjustment	Pan: 0°~360°; Tilt:0°~90°; Rotation: 0°~360°	
Image		
Video Compression	H.265 / H.264	
H.264 Compression Standard	Baseline Profile/Main Profile/High Profile	
Resolution	8MP (3840 × 2160), 6MP (3072 × 2048), 5MP (2592 × 1944), 4MP (2592 × 1520), 2MP (1920 × 1080), 720P (1280 × 720), D1, CIF, 480 × 240	
Main Stream	8MP/6MP/5MP/4MP/2MP(1~20fps)	
Sub Stream	D1/CIF/480 × 240(1~20fps)	
Third Stream	720P/D1/CIF(1~20fps)	
Bit Rate	64 Kbps ~ 8 Mbps	
Bit Rate Type	VBR / CBR	
Audio Compression	G711A / U	
Image Settings	ROI, Saturation, Brightness, Hue, Contrast, Wide Dynamic, Sharpness, NR, etc. adjustable through client software or web browser	
ROI	Each ROI to be configured separately	
Interfaces		
Network	RJ45	
Video Output	No	
Audio	1CH audio input	
Storage	Built-in micro SD card slot; up to 128GB	
Reset	Yes	
Functions		
Remote Monitoring	Web browsing, CMS remote control	
Online Connection	Support simultaneous monitoring for up to 3 users; Support multi-stream real time transmission	
Network Protocol	UDP, IPv4, IPv6, DHCP, NTP, RTSP, PPPoE, DDNS, SMTP, FTP, 802.1x, UPnP, HTTP, HTTPS, QoS	
Interface Protocol	ONVIF	
Storage	Network remote storage, micro SD card storage	
Smart Alarm	Motion detection, SD card error, SD card full	
Intelligent Analytics	Region intrusion detection, scene change detection and line crossing detection	
General Function	Watermark, IP address filtering, video mask, heartbeat, illegal login lock	
PoE	Yes	
IR Distance	30 ~ 50 m	
Ingress Protection	IP 67	

Others

Power Supply	DC12V/PoE
Power Consumption	< 9.5W
Operating Environment	- 30 °C ~ 60 °C (-22°F~140°F) Humidity: less than 95 % (non-condensing)
Dimensions (mm)	217.7 × 80.5 × 80.5
Weight (net)	Approx. 0.66KG
Installation	Ceiling mounting; Wall mounting
Certificate	CE, FCC
Environmental Protection	Complies with Directive EU RoHS, WEEE(2012/19/EU), directive 94/62/EC and REACH(EC1907/2006)

DIMENSIONS

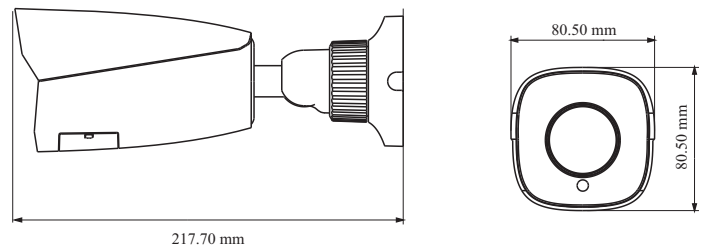

AVAILABLE ACCESSORIES



AVAILABLE MODEL

Available Model	TD-9482S3(D/PE/AR3)	Fixed lens
	TD-9482S3(D/AZ/PE/AR3)	Motorized zoom lens