



AX Series
**Hands-Free Video
Intercom with Integration**



Commercial | Educational | Healthcare | Industrial

Features and Benefits

Versatile capacity with Cat-5e wiring

Flexible system allows up to 8 master stations and a combination of 120 door stations, sub stations, or adaptors using common network cable.

Reliable visitor screening, convenient door release

Visitors can safely be identified with clear audio and video prior to unlocking the door with the simple push of a button.

Integrates with mainstream security peripherals

Integrate the AX Series into existing security components including CCTV systems, electronic access control, and telephone transfer.

Provides security in remote areas

Reduce exposure to risk in remote locations by adding door stations to parking garages, stanchions, gates, and more.

Monitor all entrances, inside and outside

Video door stations allow activity at each location to be seen and heard at the master stations.

All, Group, and Selective Call

Master stations can be used to call all master stations, to call grouped master stations, and to selectively call individual master stations, door stations, and sub stations connected to the same system.

Video output

Composite video output allows the video to be recorded or seen on a larger screen.




Paging adaptor

Broadcast important announcements through a paging system using the AXW-PA1.

Intuitive programming software

Features and functions are easily programmed using the custom software, included with the central exchange unit.

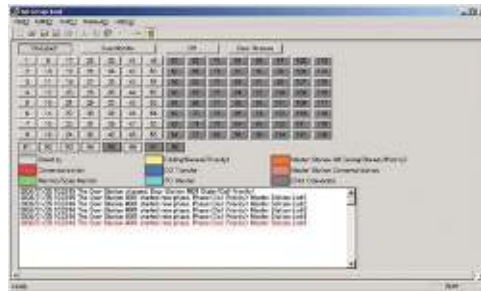

Components

Central Exchange Units: select 1 (required for system—includes programming software)



AX-084C

Central Exchange Unit

(supports up to 4 master stations and 8 door/sub stations)

3-7/16" H 16-9/16" W 13-3/16" D



AX-248C

Central Exchange Unit

(supports up to 8 master stations and 24 door/sub stations)

3-7/16" H 16-9/16" W 13-3/16" D

Add-On Central Exchange Unit: select up to 3 (optional—based on number of door and sub stations selected)



AX-320C

Add-On Central Exchange Unit

(supports up to 32 door/sub stations)

3-7/16" H 16-9/16" W 13-3/16" D

Components

Door Stations and Indoor Sub Stations: mix and match up to 120



AX-DV

- Video Door Station
- Aluminum die cast
 - Weather and vandal resistant
 - Surface mount
- 7-11/16" H
3-15/16" W
1" D



AX-DVF

- Video Door Station
- Stainless steel panel
 - Weather and vandal resistant
 - Flush mount (back box included)
- 9-11/16" H
5-3/4" W
2-1/2" D*



AX-DV-P

- Video Door Station with HID® Card Reader (requires a third-party host and additional wire to power card reader)
- Stainless steel panel
 - Weather and vandal resistant
 - Surface mount (back box included)
- 9-5/8" H
3-15/16" W
1" D



AX-DVF-P

- Video Door Station with HID® Card Reader (requires a third-party host and additional wire to power card reader)
- Stainless steel panel
 - Weather and vandal resistant
 - Flush mount (back box included)
- 11-5/8" H
5-3/4" W
2-1/2" D*

*Aiphone recommends a 2-1/2" minimum back box depth for all flush mount door stations.



AX-DV

- Mullion-Mount Audio Door Station
- Plastic chassis
 - Weather resistant
 - Surface mount
- 6-5/16" H
1-11/16" W
7/8" D



IF-DA

- Audio Door Station
- Plastic chassis
 - Weather resistant
 - Surface mount
- 5-1/8" H
3-7/8" W
1-1/8" D



IE-JA

- Audio Door Station
- Stainless steel cover
 - Weather resistant
 - Flush mount (fits 2-gang box)
- 4-1/2" H
4-9/16" W
2-1/2" D*



IE-SS/A

- Audio Door Station
- Stainless steel panel
 - Weather and vandal resistant
 - Flush mount (fits 2-gang box)
- 4-3/4" H
4-3/4" W
2-1/2" D*



IE-SSR

- Audio Door Station
- Red mushroom call button
 - Stainless steel panel
 - Weather and vandal resistant
 - Flush mount (fits 2-gang box)
- 4-3/4" H
4-3/4" W
2-1/2" D*



AX-A

- Audio Sub Station
- Plastic chassis
 - Surface mount
- 7-1/16" H
5-5/8" W
2-1/8" D



AX-AN

- Privacy Audio Sub Station
- Plastic chassis
 - Privacy button
 - Surface mount
- 7-1/16" H
5-5/8" W
2-1/8" D



AX-B

- Audio Sub Station
- Plastic chassis
 - Semi-flush mount
- 8-3/16" H
6" W
2" D



AX-BN

- Audio Door Station
- Plastic chassis
 - Privacy button
 - Semi-flush mount
- 8-3/16" H
6" W
2" D

Master Stations: mix and match up to 8



AX-8MV

- Video Master Station
- 3-1/2" LCD screen



AX-8MV-W

- Video Master Station (recommended for an 8 x 8 system only)
- White chassis
 - 3-1/2" LCD screen



AX-8M

- Audio Master Station

Shared Features:

- Hands-free or push-to-talk communication
 - Two talk channels
 - Composite video output from CEU/video master stations
 - All Call or Group Call to master stations
 - Scan monitoring
 - Wall or desk mount
- 6-7/8" H
7-5/8" W
1-7/8" D

Components

Power Supply

(two required per system)



PS-2420UL

24V DC, 2A
Power Supply
6-9/16" H
3-9/16" W
2-1/16" D

Accessories



AXW-PA1

Paging
Adaptor
4-1/8" H
2-1/2" W
1-1/2" D



AXW-AZ

CCTV Input Module
1-5/8" H
7" W
4" D



AXW-AVT

Media Converter Transmitter
1-5/8" H
7" W
4" D




AXW-AVR

Media Converter Receiver
1-5/8" H
7" W
4" D



AX-16SW

16-Call Add-On
Selector for
AX-8MV or AX-8M
(max. 7 per master)
6-7/8" H
3-3/8" W
1-7/8" D



SBX-2G/A

Surface Mount Box for
IE-JA, IE-SS/A, or IE-SSR
4-13/16" H
4-7/8" W
4" D



KMB-45

45° Mullion
Mounting Bracket
for IF-DA
5-1/2" H
5-1/2" W
1-3/4" D



SBX-AXDV30

30° Angle Box
for AX-DV
7-11/16" H
3-7/8" W
2-7/8" D



SBX-AXDVF

Surface Mount
Box for AX-DVF
9-3/4" H
5-7/8" W
2-13/16" D



SBX-DVF-P

Surface Mount
Box for AX-DVF-P
11-11/16" H
5-15/16" W
2-13/16" D



EL-12S

Electric Door
Strike for
Wood Frames
4-1/8" H
13/16" W
1-1/8" D



RY-1824L

Form C Door
Release Relay
(1 per door)



RY-ES

External
Signaling Relay
4-1/8" H
2-7/16" W
1-5/8" D



IER-2

Call Extension
Speaker
4-3/4" H
3-7/16" W
1-1/8" D



MCW-S/B

Desk Stand for
AX-8MV, AX-8MV-W,
or AX-8M (mounting
hardware included)
6-1/2" H
6-1/2" W
8" D

Specifications

Power Source	24V DC—use two PS-2420ULs
Communication	Hands-free (VOX) or push-to-talk (simplex)
Door Release	Programmable dry contact, 24V AC/DC, 500mA—use RY-1824L for larger contact rating
Wire Type	Between Door/Sub Station, Master Station, and Central Exchange Unit: Cat-5e Power Supply to Central Exchange Unit and Add-On Central Exchange Unit: 2-cond., overall shield—use Aiphone 821802
Distance	Door/Sub Station to Central Exchange Unit and Add-On Central Exchange Unit: 980' Central Exchange Unit to Master Station: 980' Central Exchange Unit to Add-On Central Exchange Unit: 16' Power Supply to Central Exchange Unit and Add-On Central Exchange Unit: 16' (22 AWG) 33' (18 AWG)



SECURITY
COMMUNICATION
SOLUTIONS

aiphone.com

Customer Service
and Technical Support

(800) 692-0200

Headquarters – Redmond, WA

East Office – Cherry Hill, NJ

Canada Office – Laval, QC

WATCH | CONNECT | LIKE | FOLLOW



AX Series Brochure

© 2022 Aiphone Corp.
Revised 08/2022.
All rights reserved.
Designed in the USA.

The information in this
brochure is subject to
change without notice.