

VTO3211D-P/P2/P4-S1

IP 1/2/4-button Villa Outdoor Station



Technical Specification

Model VTO3211D-P/P2/P4-S1

System

Main Processor Embedded Micro Processor

Operation System Embedded LINUX OS

Video

Video Compression H.264

Image Sensor 1/2.8" 2MP CMOS

Focal Length 1.9mm

Angle of View H:134°, V: 94.8°, D:151°

Day/Night ICR

Audio

Audio Compression G.711

Audio Input Omnidirectional Mic

Audio Output Built-in Speaker

Bidirectional Talk Support Dual-way Bidirectional talk

Operation Mode

Keypad 1/2/4 Mechanical Buttons

Reader Mifare Card

Interface

Door Control 1

Alarm Out 1

Alarm In 2(1ch unlock button, 1ch feedback)

RS485 1

Features

- 2MP HD CMOS camera
- Zinc Alloy panel, IK08, IP65 (Apply silica gel to gaps between the device and the wall. Liquid sodium silicate is recommended. For details, see the quick start guide.)
- ICR Night vision & Voice indication
- Video & Audio messaging
- Remote intercom with mobile APP
- Surface mounted



Network

Ethernet 10M/100Mbps Self-adaptive

Network Protocol TCP/IP

Ethernet 10M/100Mbps Self-adaptive

Network Protocol TCP/IP

General

Ingress Protection IK08, IP65 (Apply silica gel to gaps between the device and the wall. Liquid sodium silicate is recommended. For details, see the quick start guide.)

Tamper Switch 1

Installation Surface

Material Zinc Alloy

Power DC 12V, PoE(802.3af)

Power Consumption Work ≤6W


Working Temperature -30°C to +60°C

Relative Humidity 10%RH-90%RH


Dimensions 182.0mm×30.0mm×101.0mm

Weight 0.8kg

Dimensions

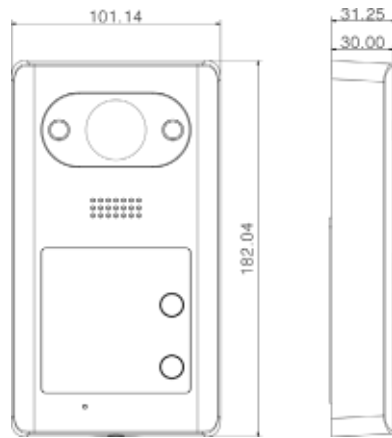

View Area

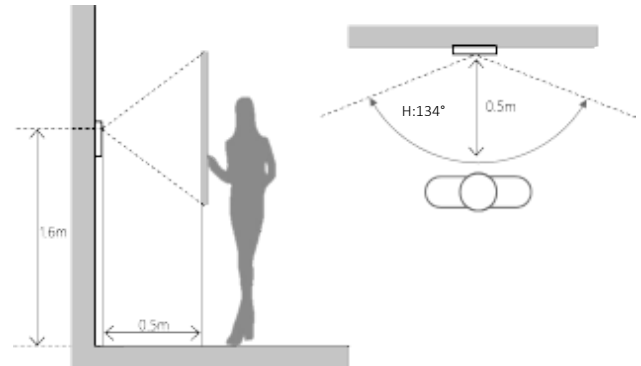

Application

