



## DESCRIPTION

The JO-DV is an aluminum die cast surface mount color video door station. The JO-DV can be used with the JO Series or with the GT-MKB-N Video Guard Station in the GT Series. The station will connect to the master/guard station, expansion station, or two door station adaptor (JOW-2D) using an 18AWG 2-conductor solid core cable. The JO-DV includes a camera, microphone, speaker, and call button.

When the call button on the door station is pushed, the inside stations ring and the video monitor comes on with the image from the door station's camera. The user at the inside station touches the "TALK" button to initiate communication. The person at the door station speaks hands-free.


## FEATURES

- Color video camera with audio intercom
- 2-way hands-free voice communication
- Call button to initiate call
- White LED illuminator for low light conditions
- Simple 2-conductor wiring
- Surface mount
- 330' wiring distance to Master on 18AWG 2-conductor cable (Aiphone wire #871802)
- Only JO door station that is sold separately

# JO-DV

## Camera Door Station for the JO Series

### FEATURE CALL-OUT

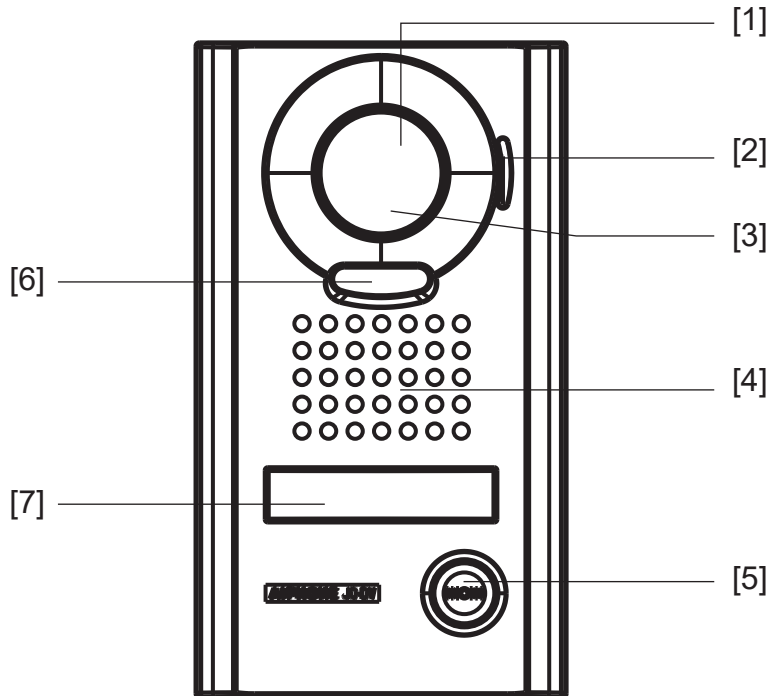

### FEATURE CALL-OUT DEFINITIONS

- [1] Camera
- [2] Microphone
- [3] Illumination sensor
- [4] Speaker
- [5] Call button
- [6] White LED
- [7] Directory Card

### SPECIFICATIONS

- Power Source: Supplied from Master
- Communication: Hands-free communication
- Camera: CMOS
- Min. illumination: 5 lux
- Wiring: 2-conductor, PE insulation, Aiphone wire #871802
- Wiring Distance: 330'
- Operation Temp: -40~140° F (-40~60° C)
- Dimensions: 6-<sup>13</sup>/<sub>16</sub>" x 3-<sup>7</sup>/<sub>8</sub>" x 1-<sup>1</sup>/<sub>16</sub>"  
HxWxD (179 x 98 x 26.8 mm)
- Weight: 1.43lbs (650g)  
(approx)