

# PBB3S Series

## AC/DC POWER SUPPLIES

### FEATURES

- 12Vdc and 24Vdc 50W, 100W, and 150W power supplies
- High reliability and high efficiency industrial-grade switching power converter
- Universal AC input range from 100Vac to 240Vac nominal without power derating
- Light weight corrosion resistant aluminium enclosure
- Output overcurrent and short circuit protection
- Output overvoltage protection
- Overtemperature protection
- Green Mains/DC OK LED



### SPECIFICATIONS

INPUT	
Nominal Voltage	100-240Vac
Current	50W Models: 1.5A
	100W Models: 2.8A
	PBB3S-12-12: 2.0A
	PBB3S-24-6: 3.2A
Nominal Frequency	50-60Hz
Power Factor	Conforms to EN61000-3-2
OUTPUT	
Output Voltage	See Table
Output Current	See Table
Output Power	See Table
Ripple and Noise *1	See Table
Short Circuit Protection	Hiccup, non-latching
Overcurrent Protection	Hiccup overcurrent prot'n, >115% of rated current
Overvoltage Protection	See table, Hiccup
	*1 BW=20MHz

DISPLAYS / ALARMS	
Mains/DC OK	Green LED: ON=OK
STANDARDS	
Safety	AS/NZS60950.1, Class I
Isolation	I/P to Output - 3.0 kVac, 1 min. I/P to Ground - 1.9 kVac, 1 min. O/P to Ground - 500 Vac, 1 min.
EMC	AS/NZS CISPR22 Class B
MECHANICAL	
Case Size	219x114x62mm (LxWxH)
Weight	50W Models: 600g 100W Models: 900g 150W Models: 1050g
ENVIRONMENTAL	
Operating Ambient Temp.	-10°C to 70°C Derating: -2.5%/°C above 40°C
Cooling	Natural Convection
Overtemperature Protection	Automatic – Self resetting




### SELECTION TABLE

Model Number	Output Voltage	Output Current	Output Power	Output Ripple & Noise	Overvoltage Trip
PBB3S-12-4	12.0Vdc	4.17A	50W	<100mVp-p	16Vdc +10%/-5%
PBB3S-12-8	12.0Vdc	8.33A	100W	<100mVp-p	16Vdc +10%/-5%
PBB3S-12-12	12.0Vdc	12.5A	150W	<100mVp-p	16Vdc +10%/-5%
PBB3S-24-2	24.0Vdc	2.1A	50W	<150mVp-p	32Vdc ±10%
PBB3S-24-4	24.0Vdc	4.17A	100W	<150mVp-p	32Vdc ±10%
PBB3S-24-6	24.0Vdc	6.25A	150W	<100mVp-p	32Vdc +10%/-5%

# PBB3S Series

AC/DC POWER SUPPLIES

## TECHNICAL ILLUSTRATIONS

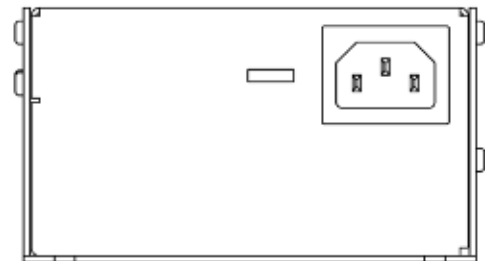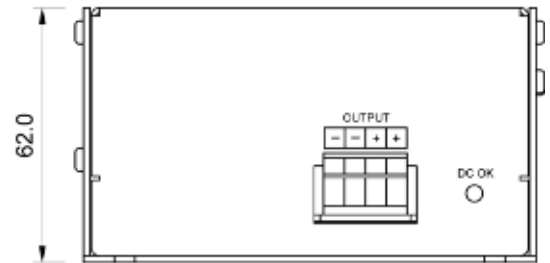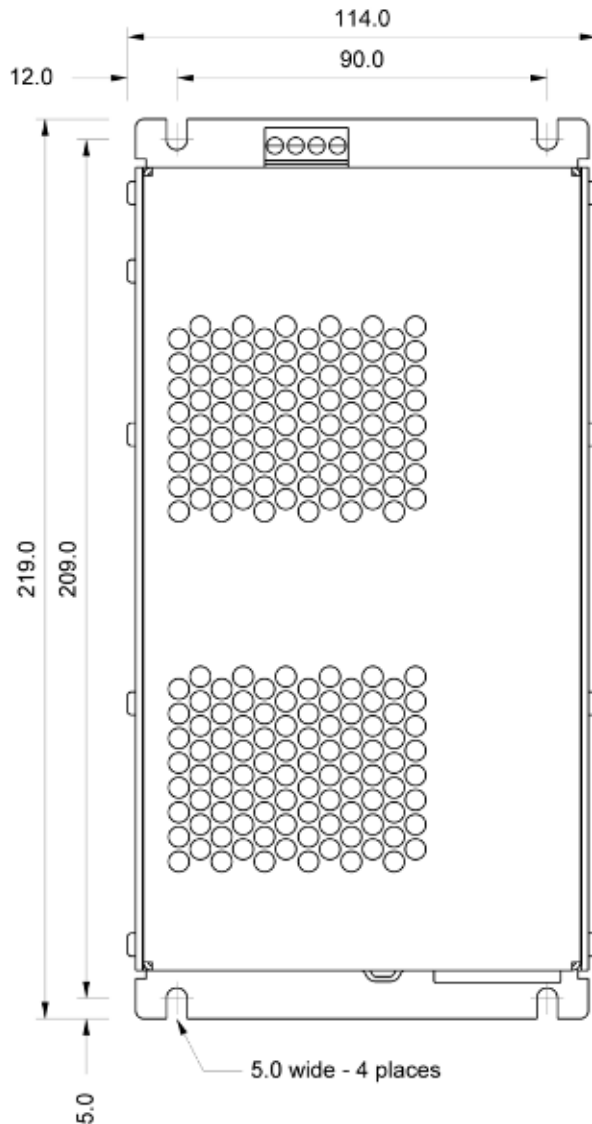

### NOTES :

1. AC Mains Termination:  
10A IEC60320 C14 Appliance Inlet
2. Output Terminations:  
4W Pluggable Screw Terminal Block  
Suitable for up to 2.5 sq. mm wire.

Available at



Consolidated  
**SECURITY  
MERCHANTS**

Phone: 1300 663 904  
[www.csmerchants.com.au](http://www.csmerchants.com.au)  
ABN : 33 618 009 680

#### VIC: Melbourne

Unit 144, Access Corporate Park,  
45 Gilby Road, Mt Waverley  
Melbourne, VIC 3149  
PH: 03 9558 8455  
FAX: 03 9558 8486  
Email:  
[sales.vic@csmerchants.com.au](mailto:sales.vic@csmerchants.com.au)

#### NSW: Sydney

Unit 1, 52-60 Roberts Road,  
Greenacre, NSW 2190  
Tel: 02 9890 5300  
Fax: 02 9890 5600  
Email:  
[sales.nsw@csmerchants.com.au](mailto:sales.nsw@csmerchants.com.au)

#### QLD: Brisbane

Unit 1, 107 Do Vinci Business Park  
2-6 Leonarda Drive, Brisbane Airport  
Eagle Farm, QLD 4007  
Tel: 07 3552 5966  
Fax: 07 3552 5977  
Email:  
[sales.qld@csmerchants.com.au](mailto:sales.qld@csmerchants.com.au)

#### SA: Adelaide

Unit 1, 60 Grove Avenue,  
Marleston, SA 5033  
Tel: 08 8297 5555  
Fax: 08 8297 5500  
Email:  
[sales.sa@csmerchants.com.au](mailto:sales.sa@csmerchants.com.au)

#### WA: Perth

Unit 4, 103 Erindale Road,  
Balcatta, WA, 6021  
Tel: 08 9344 2555  
Fax: 08 9344 3555  
Email:  
[sales.wa@csmerchants.com.au](mailto:sales.wa@csmerchants.com.au)

#### Tasmania

Local Electronics  
194A Main Road,  
Maanah Tas 7009  
Tel: 03 62 72 72 88  
Email:  
[sales@locelectronics.com.au](mailto:sales@locelectronics.com.au)

