


CAMERA

TD-9555A3-PA

5MP AI Dome Network Camera



- 5MP (2592 × 1944) H.265 full real time coding
- Max.resolution: 2592 × 1944; ICR auto switch, true day / night
- 30 ~ 50m IR night view distance
- Motorized zoom lens
- 3D DNR, true WDR, HLC, BLC and ROI coding
- 1CH audio input; 1CH audio output, 1CH speaker, 1CH MIC
- Hardware reset; Built-in micro SD card slot, up to 128GB
- DC12V/PoE power supply
- IP67ingress protection; Support three streams
- P2P function optional
- Support mobile surveillance by smart phones with iOS and Android OS
- Intelligent analytics: abnormal video signal detection (scene change, video tampering), line crossing detection (human/vehicle classification), region intrusion detection (human/vehicle classification), sound and light warning

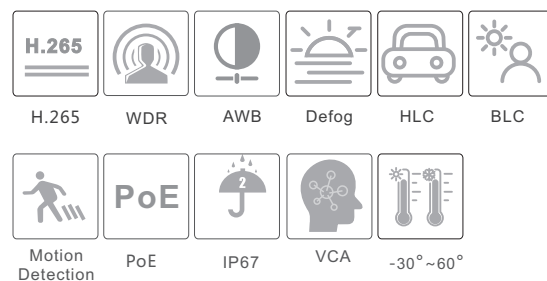

en.tvt.net.cn

For more information, please visit our website

Shenzhen TVT DIGITAL TECHNOLOGY CO., LTD.

Address: 23rd Floor, Block B4, Building NO.9, Shenzhen Bay Eco-Technology Park, Nanshan District, Shenzhen, Guangdong Province, P.R.China

Tel: +86-755-36995888

Web site: <http://en.tvt.net.cn>

Fax: +86-755-33104777


E-mail: overseas@tvt.net.cn

SPECIFICATIONS

Model	TD-9555A3-PA
Specifications	
Camera	
Image Sensor	1 / 2.7 "CMOS
Image Size	2592×1944
Electronic Shutter	1 / 25 s ~ 1 / 100000 s
Iris Type	DC Iris
Min. Illumination	0.008 lux @F1.4, AGC ON; 0 lux with IR 0.0045 lux @ F1.2, AGC ON; 0 lux with IR
Lens	Motorized zoom lens; 2.8mm~12mm@F1.4, HFoV:92.7°~29.8°
Lens Mount	Φ14
Wide Dynamic Range	120dB
BLC	Yes
HLC	Yes
Defog	Yes
Digital NR	3D DNR
Angle Adjustment	Pan: 0°~360°; Tilt: 0°~80°; Rotation: 0°~360°
Image	
Video Compression	Smart H265 / H.265+ / H.265 / Smart H264 / H.264+ / H.264 / MJPEG
H.264 Compression Standard	Baseline Profile/Main Profile/High Profile
Resolution	5MP (2592 × 1944), 4MP (2592 × 1520), 2K (2560 × 1440), 3MP (2304 × 1296), 1080P (1920 × 1080), 720P (1280 × 720), D1, CIF, 480 × 240
Main Stream	60Hz : 5MP/4MP/ 2K/3MP/ 1080P/ 720P(1~30fps) 50Hz : 5MP/ 4MP/ 2K/3MP/ 1080P/ 720P (1~25fps)
Sub Stream	60Hz : 720P/D1/CIF (1~30fps); 50HZ:720P/D1/CIF (1~25fps)
Third Stream	60Hz : D1/CIF/480 × 240 (1~30fps); 50HZ: D1/CIF/480× 240 (1~25fps)
High Frame Rate Mode	Main stream: 1080P/720P(1~60fps/1~50fps)
Bit Rate	256 Kbps ~ 9 Mbps
Bit Rate Type	VBR / CBR
Audio Compression	G711A / U
Image Settings	ROI, Saturation, Brightness, Chroma, Contrast, Wide Dynamic, Sharpen, NR, etc. adjustable through client software or web browser
ROI	Each ROI to be configured separately
Interfaces	
Network	RJ45
Video Output	No
Audio	1CH audio input; 1CH audio output; 1CH built-in speaker; 1CH built-in MIC
Alarm	1CH alarm input; 1CH alarm output
Storage	Built-in micro SD card slot; up to 128GB
Hardware Reset	Yes
Functions	
Remote Monitoring	Web browsing, CMS remote control
Online Connection	Support simultaneous monitoring for up to 6 users; Support multi-stream real time transmission
Network Protocol	UDP, IPv4, IPv6, DHCP, NTP, RTSP, PPPoE, DDNS, SMTP, FTP, SNMP, 802.1x, UPnP, HTTP, HTTPS, QoS
Interface Protocol	ONVIF
Storage	Network remote storage; micro SD card storage
Smart Alarm	Motion detection; sensor alarm; SD card error; SD card full; IP address conflict; cable disconnection
General Function	Watermark, IP address filtering, video mask, heartbeat, illegal login lock
PoE	Yes (IEEE802.3af)
IR Distance	30 ~ 50 m
Ingress Protection	IP67
Intelligent Analytics	
Video Abnormality	Scene change detection, video tampering detection

Perimeter Detection	Region intrusion detection, region entrance detection, region exiting detection and line crossing detection (human/vehicle classification),
Sound & Light Warning	Yes
Others	
Power Supply	DC12V/PoE
Power Consumption	< 11.5W
Operating Environment	- 30 °C ~ 60 °C (-22°F~140°F) Humidity: less than 95 % (non-condensing)
Dimensions (mm)	Φ 111.5 × 99.6
Weight (net)	Approx. 0.64KG
Installation	Ceiling mounting; Wall mounting

DIMENSIONS

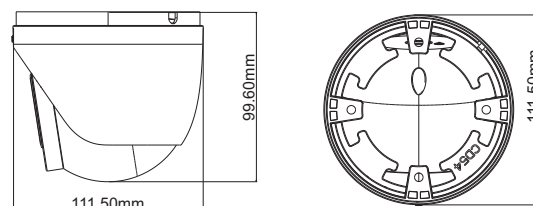

AVAILABLE ACCESSORIES



AVAILABLE MODEL

Available Model	TD-9555A3-PA
-----------------	--------------