

SL410 Lens **4K Resolution Day/Night lenses** up to 1/1.7" sensors

- Ultra high resolution for 4K cameras, up to ~ 12.4 megapixel
- Available in DC auto-iris, P-iris, and manual iris versions
- Non-motorized version, Fully motorized versions available with combinations with zoom, focus, iris, IR cut, limit switch
- IR corrected for true Day/Night cameras \checkmark
- Compact design to fit into domes as small \checkmark as 4" mini-dome size
- CS-mount as well as C-mount 1
- ✓ Used for sensor sizes 1/2.5", 1/2.3", 1/ 2" 1/1.8", and up to 1/1.7" (Sony IMX178, Sony IMX226 for example)

1/2.3"

90° - 36°

67° - 27°

117° - 45°

OM ount al iris			
al iris			
4-10mm			
Ø9.4mm			
12.4 megapixel			
F/1.4 @ 4mm – F/2.4 @ 10mm to close			
0.5m to infinity			
Day/Night			
< 64mm TTL			
69-78g (depending on version)			
 -20C to 60C (<70% humidity, non-condensing) 			
-30C to 70C (<90% humidity, non-condensing)			
Ø9.4mm 12.4 megapixel F/1.4 @ 4mm – F/2.4 @ 10mm to close 0.5m to infinity Day/Night < 64mm TTL			

SI 410 long family specifications

Field of view for sensor sizes

52°

1/1.8" 4K*

110° - 43°

1/2"

93° - 37°

68° - 28°

120° - 46°

Sensor size Horizontal

Vartical

	81° - 33°	71° - 29°	52° - 21°
Diagonal	149° - 55°	139° - 52°	126° - 48°
* 414 5 1	1000 0000		

1/1.8"

110° - 43°

ာဂ∘

710

*4K format = 4000 x 2000 pixels

1/1.7"

112° - 44°


010 220


1/2.5"

83° - 33°

60° - 25° 106° - 42°



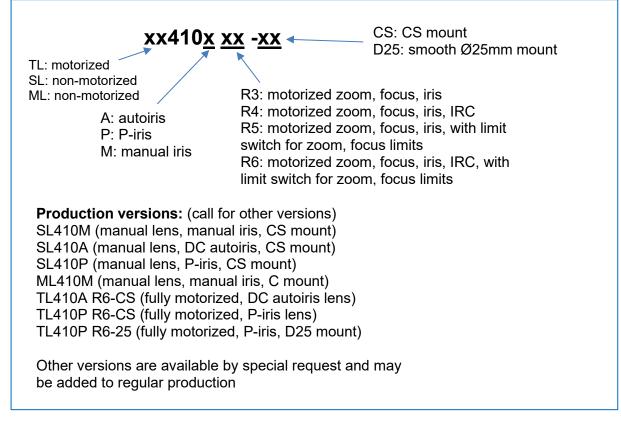

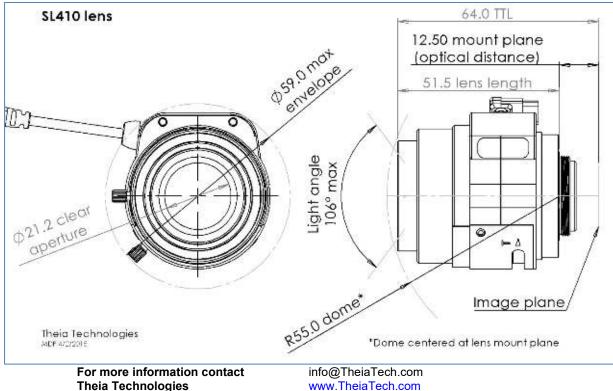

www.TheiaTech.com +1-503-570-3296

