


TD-9423A1

2MP Face Detection Bullet AI
Network Camera



- 1080P (1920 × 1080) full real time coding
- Max. resolution: 1920 × 1080
- 30 ~ 50m white light view distance
- Motorized zoom lens
- 3D DNR, Digital WDR, HLC, BLC and ROI coding
- One CVBS output and one on-board CVBS output
- 1CH audio input and 1CH audio output; Hardware reset
- Built-in micro SD card slot, up to 128GB
- 1CH alarm input; 1CH alarm output; RS485
- DC12V/AC24V/PoE power supply
- Support smart phone, iPad, remote monitoring
- P2P function optional; IP67 ingress protection
- Support three streams
- Smart Analytics: object removal detection, abnormal video signal detection, line crossing detection, region intrusion detection, people intrusion detection, people counting detection, crowd density detection and face detection

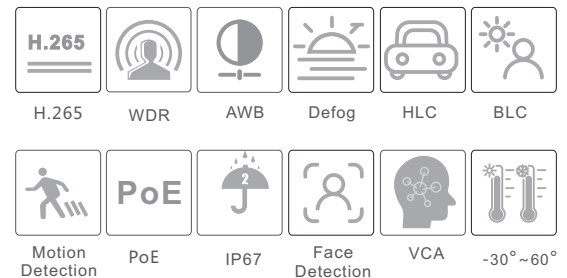

en.tvt.net.cn

For more information, please visit our website

Shenzhen TVT DIGITAL TECHNOLOGY CO., LTD.

Address: 23rd Floor, Block B4, Building NO.9, Shenzhen Bay Eco-Technology Park, Nanshan District, Shenzhen, Guangdong Province, P.R.China

Tel: +86-755-36995888

Web site: <http://en.tvt.net.cn>

Fax: +86-755-33104777


E-mail: overseas@tvt.net.cn

SPECIFICATIONS

Model	TD-9423A1
Specifications	
Camera	
Image Sensor	1 / 2.8 "CMOS
Image Size	1920 × 1080
Electronic Shutter	1 / 25 s ~ 1 / 100000 s
Iris Type	Fixed Iris
Min. Illumination	0 lux
Lens	7~22mm@F1.4, horizontal FoV: 37°~22.5°; recommended face capturing distance: 5~15m
Lens Mount	Φ14
Wide Dynamic Range	Digital WDR
BLC	Yes
HLC	Yes
Defogging	Yes
Digital NR	3D DNR
Angle Adjustment	Pan: 0°~360°; Tilt: 0°~90°; Rotation: 0°~360°
Image	
Video Compression	H.265 / H.264 / MJPEG
H.264 Compression Standard	Baseline Profile/Main Profile/High Profile
Resolution	1080P (1920 × 1080), 720P (1280 × 720), D1, CIF, 480 × 240
Main Stream	60Hz : 1080P/ 720P (1 ~ 30fps); 50Hz : 1080P/ 720P (1 ~ 25fps)
Sub Stream	60Hz : D1/CIF (1~30fps); 50Hz : D1/CIF (1~25fps)
Third Stream	60Hz : CIF/480x240 (1~30fps); 50Hz : CIF/480x240 (1~25fps)
Bit Rate	128 Kbps ~ 6 Mbps
Bit Rate Type	VBR / CBR
Image Settings	ROI, Saturation, Brightness, Chroma, Contrast, Wide Dynamic, Sharpen, NR, etc. adjustable through client software or web browser
ROI	Each ROI to be configured separately
Interfaces	
Network	RJ45
Video Output	CVBS output (BNC × 1); one on-board CVBS output
Audio	1CH audio input; 1CH audio output
Storage	Built-in micro SD card slot, up to 128GB
Hardware Reset	Yes
RS 485	Yes
Alarm	1CH alarm input; 1CH alarm output
Functions	
Remote Monitoring	Web browsing, CMS remote control
Online Connection	Support simultaneous monitoring for up to 6 users; Support multi-stream real time transmission
Network Protocol	Ipv4, Ipv6, UDP, DHCP, NTP, RTSP, PPPoE, DDNS, SMTP, FTP, SNMP, 802.1x, UPnP, HTTPs, QoS
Interface Protocol	ONVIF
Storage	Network remote storage; micro SD card storage
Smart Alarm	Motion detection; Sensor alarm; SD card full; SD card error; IP conflict; Network disconnection
Intelligent Analytics	Object removal detection, regional intrusion detection, abnormal video detection, line crossing detection, people intrusion, people counting, crowd density, face detection (optional)
General function	Watermark, IP address filtering, video mask, heartbeat, password protection
PoE	Yes (802.3af)
LED View Distance	30 ~ 50 m
Ingress Protection	IP67
Face Detection	
Face Detection	Pupil distance of a facial image over 20 pixel can be detected
Face Capturing	By precision detecting, tracing, capturing, scoring and screening the moving faces to get the most effective face snapshots

Panorama Capturing	Support panorama capturing and self-defined information overlay, like device ID, time, etc.
Intelligent Light Compensation	Built-in high efficient white light LEDs, time switch available
Others	
Power Supply	DC12V/AC24V/PoE
Power Consumption	< 12W
Operating Environment	- 30 °C ~ 60 °C (-22°F~140°F) Humidity: less than 95 % (non-condensing)
Dimensions (mm)	Φ 100.3 × 279.5
Weight (net)	Approx. 1.06KG
Installation	Wall mounting; ceiling mounting

DIMENSIONS

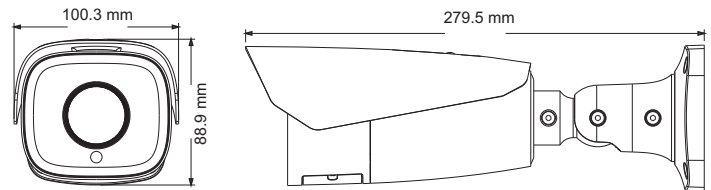

AVAILABLE ACCESSORIES



AVAILABLE MODEL

Available Model	TD-9423A1(D/AZ/PE/AR3)
-----------------	------------------------