

## Delivering “Risk Management” Best Practice



# AARC EVAC™

**A Wireless Linked Emergency Alert System  
Delivering Siren & Voice Message Broadcasts**

## **Assisting**

Industry, Government, Education, Community, Leisure & Medical  
Venues and Workplaces to deliver

**Risk Management - Best Practice**

### **Evacuation**

- Sirens with clear and concise voice instructions
- Multi-lingual voice instructions, if required
- Area specific messages across the site



### **First Aid Assist**

- Distributed First Aid call points
- Voice message defined by location
- Rapid first-response to medical or injury emergency

### **Duress**

- Instant localised coded messages
- Rapid Peer Support
- Reduction in OVA



**Achieving  
better  
outcomes**



### **Lockdown**

- Distributed activation points
- Site-wide
- Rapid response

### **Alerts**

- Cyclone
- Lightning
- Bushfire
- Tsunami
- And more



### **Drill**

- Drill message can proceed any emergency alert for efficient and effective training

**AARC-EVAC™ is a smart, simple to use, simple to install  
Emergency Siren & Voice Message Broadcast System**

## What is AARC-EVAC™

The AARC-EVAC™ system provides emergency alert sirens with clear and concise voice instructions. The system consists of a wireless network of push button battery powered transmitters and standalone autonomous audio broadcast units each with its own battery backed UPS.

The extensive range of emergency alerts available in the system include: Evacuation, Lockdown, Multi-Location Duress, Multi-Location First Aid Assist, Cyclone, Bushfire, Lightning, Tsunami and more.

All alerts include clear and concise voice instructions in any language or multi-lingual as

required. All the alert sirens and voice messages are customer designated.

The key features that make this product unique in the world market are:


- The ability and flexibility to provide, customer designated, sirens plus clear and concise, multilingual voice instructional, assistance call and warning instruction messages.
- The provision for Multi-Location Duress and Multi-Location First Aid Assist call messages.
- The ease of installation, being a wireless linked system.

AARC-EVAC™ is an Australian Designed and Manufactured Outstanding Product!

AARC Systems™ has developed an inspiring and novel industrial/commercial range of products capable of delivering innovative global solutions, in the safety and security space, to a world market.

The company's product innovation and the uniqueness of its AARC-EVAC™ products has resulted in AARC Systems providing system solutions for customers throughout Australia and Internationally.

# Help is just a click away!

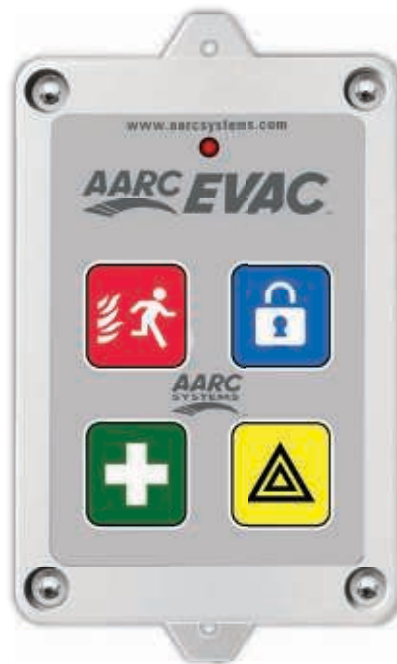

### Evacuation

Triggers Australian Standard Evacuation Tones plus a customisable recorded message ordering an evacuation of the premises.

### First Aid Assist

Multiple location assist messages based on button location can be established throughout a venue or workplace.

### Lockdown

Triggers a covert recorded message or a public warning signalling personnel to begin a lockdown procedure in the event that an external threat is identified.


### Duress

Single or Multiple Alert Panels can trigger a zoned message, customised to call for assistance to its particular location. Customisable messages can be established within each system.

ATX35-LD-G Alert Panel/Transmitter

### Hidden Cancel

A discrete hidden button allows Evacuation, Lockdown or First Aid and Duress calls to be cancelled. This button is hidden so that only personnel trained in operating the AARC-EVAC™ system will be able to cancel these emergency alert calls.



Evacuation



Duress




Lock Down



First Aid



All Clear



Alert



Drill

## AARC-EVAC™ Remote Transmitters

AARC-EVAC™ Wireless Linked Emergency Alert Systems are designed to be activated by AARC-EVAC™ remotes.

AARC-EVAC™ Remote Transmitters come in either Hand Held (ATX2 Series), Wall Mount (ATX3 Series) and a (ATX3-E Series) with a connection for an external Antenna. Hand Held remotes are used as a portable transmitter. However they can also be wall mounted using Velcro hook and loop fastening to provide a home when not required for remote use, eg. yard duty. Wall Mount remotes are designed to be wall mounted with 111.5mm mounting centers. They are available with internal antenna or there is a version that allows for an external antenna.

The AARC-EVAC™ system uses a range of intuitive icons for its alarm buttons, so they can be interpreted regardless of language. The Multi-button remotes and "Single" button Evacuation remote also feature a hidden Cancel button, under the AARC System logo.

Remote Transmitters are all powered by 2 x AAA Alkaline batteries. Batteries should be replaced annually.



### Multi-button Remotes (includes a hidden cancel button)



<b>Hand Held</b>	ATX25-LD	ATX25-AC	ATX25-DU	ATX25-AS	ATX23-EF	ATX23-EL
<b>Wall Mount</b>	ATX35-LD	ATX35-AC	ATX35-DU	ATX35-AS	ATX33-EF	ATX33-EL
<b>Ext. Antenna</b>	ATX35-LD-E	ATX35-AC-E	ATX35-DU-E	ATX35-AS-E	ATX33-EF-E	ATX33-EL-E

### Single Button Remotes



<b>Hand Held</b>	ATX22-EV*	ATX21-LD	ATX21-FA	ATX21-DU	ATX21-AC
<b>Wall Mount</b>	ATX32-EV*	ATX31-LD	ATX31-FA	ATX31-DU	ATX31-AC
<b>Ext. Antenna</b>	ATX32-EV-E*	ATX31-LD-E	ATX31-FA-E	ATX31-DU-E	ATX31-AC-E



### AARC-GOLF™

Alarm buttons:

- Bad weather warning
- Take shelter / course closed
- Competition start
- All clear / resume play
- Cancel

<b>Hand Held</b>	ATX21-BE	ATX21-DR	ATX21-CN	ATX25-GO
<b>Wall Mount</b>	ATX31-BE	ATX31-DR	ATX31-CN	ATX35-GO
<b>Ext. Antenna</b>	ATX31-BE-E	ATX31-DR-E	ATX31-CN-E	ATX35-GO-E

## AARC-EVAC™ Indoor Standalone Receiver/ Message Broadcast Units with Flashing Beacons

AARC-EVAC™ Indoor Standalone Wireless Linked Emergency Alert Siren & Message Broadcast Units with Flashing Beacons. They incorporate an in-built UPS and are fully self-contained.

Currently most hard-wired systems utilise a P.A. System, these systems have a range of inherent risks i.e. if mains power fails or the P.A. cabling is damaged by fire etc., you no longer have a working emergency alert system. The deployment of standalone AARC-EVAC™ units mitigates these risks, even if one unit is damaged by a fire or other causes the rest of the units will still work.

When triggered the unit's Wireless Receiver activates standard emergency alert sirens, customisable audio messages and the appropriate flashing beacon. The unit has integrated audio amplifiers driving one internal or two, three or four external speakers. The unit is designed to operate as a single unit or as part of a network of self-contained AARC-EVAC™ Standalone Wireless Linked Emergency Siren & Message Broadcast Units.

When operating the standalone units as part of a network, different evacuation instructions and alert messages can be broadcast in different locations.

In addition to the standalone message broadcast units with beacons, the range also includes standalone beacon units. All units include the UPS backup battery system.

All units can also be supplied with a built-in wireless signal repeater if required.

**SMS Messaging Available:** All systems - whether a single receiver or a large network of receivers - have options available for sending SMS messages or being triggered by SMS messages.



Part Number	Number of Speakers	Evac Beacon	Duress Beacon	First Aid Beacon	Lockdown Beacon	Signal Repeater
ARX43-FB	Beacon Only See Page 8	☀️	☀️	☀️	☀️	-
ARX70-FB	🔊 Internal Speaker	☀️	☀️	☀️	☀️	-
ARX72-FB-xH-xB-xC	🔊🔊	☀️	☀️	☀️	☀️	-
ARX73-FB-xH-xB-xC	🔊🔊🔊	☀️	☀️	☀️	☀️	-
ARX74-FB-xH-xB-xC	🔊🔊🔊🔊	☀️	☀️	☀️	☀️	-
ARX43-FB-R	Beacon Only See Page 8	☀️	☀️	☀️	☀️	✅
ARX70-FB-R	🔊 Internal Speaker	☀️	☀️	☀️	☀️	✅
ARX72-FB-xH-xB-xC-R	🔊🔊	☀️	☀️	☀️	☀️	✅
ARX73-FB-xH-xB-xC-R	🔊🔊🔊	☀️	☀️	☀️	☀️	✅
ARX74-FB-xH-xB-xC-R	🔊🔊🔊🔊	☀️	☀️	☀️	☀️	✅

**Note: Note:** For the units supplied with the external speaker units, the customer can specify Horn, Box or Ceiling speakers or a mix of all by replacing the 'x' in the part number with the quantity of Horn (H), Box (B) or ceiling (C) speakers required.

## **AARC-EVAC™ Indoor Standalone Receiver/ Message Broadcast Units with Internal Speaker or with Horn or Box Speakers**

AARC-EVAC™ Indoor Standalone Wireless Linked Emergency Alert Siren & Message Broadcast Units. They incorporate an in-built UPS and are fully self-contained.

Currently most hard-wired systems utilise a P.A. System, these systems have a range of inherent risks i.e. if mains power fails or the P.A. cabling is damaged by fire etc., you no longer have a working emergency alert system. The deployment of standalone AARC-EVAC™ units mitigates these risks, even if one unit is damaged by a fire or other causes the rest of the units will still work.

When triggered the unit's Wireless Receiver activates standard emergency alert sirens and customisable audio messages. The unit has integrated audio amplifiers driving one, internal or two or three or four external speakers. The unit is designed to operate as a single unit or as part of a network of self-contained AARC-EVAC™ Standalone Wireless Linked Emergency Siren & Message Broadcast Units.

When operating the standalone units as part of a network, different evacuation instructions and alert messages can be broadcast in different locations.



Part Number	Number of Speakers	Evac	Alert	Duress	First Aid	Lockdown	Signal Repeater
ARX50	☞ Internal Speaker	✓	✓	✓	✓	✓	-
ARX52-xH-xB-xC	☞☞	✓	✓	✓	✓	✓	-
ARX53-xH-xB-xC	☞☞☞	✓	✓	✓	✓	✓	-
ARX54-xH-xB-xC	☞☞☞☞	✓	✓	✓	✓	✓	-
ARX50-R	☞ Internal Spk w/ Repeater	✓	✓	✓	✓	✓	✓
ARX52-xH-xB-R-xC	☞☞	✓	✓	✓	✓	✓	✓
ARX53-xH-xB-R-xC	☞☞☞	✓	✓	✓	✓	✓	✓
ARX54-xH-xB-R-xC	☞☞☞☞	✓	✓	✓	✓	✓	✓

**Note:** For the units supplied with the external speaker units, the customer can specify Horn, Box or Ceiling speakers or a mix of all by replacing the 'x' in the part number with the quantity of Horn (H), Box (B) or ceiling (C) speakers required.

**SMS Messaging Available:** All systems - whether a single receiver or a large network of receivers - have options available for sending SMS messages or being triggered by SMS messages.

## **AARC-EVAC™ Outdoor Solar Powered Wall Mount Standalone Wireless Signal Repeater**

AARC-EVAC™ outdoor solar powered wall mount units are standalone wireless signal repeaters.

These units incorporate an in-built UPS and are fully self-contained.

The solar panel wall mount bracketing is designed so that the solar panel can be rotated a full 180 degrees to assist with the alignment to the sun. It can also be wall mounted remotely from the repeater unit to take advantage from a location that has sun coverage.

**\*ATC65-W-R**

### **AARC Outdoor Solar Powered Standalone Wall Mounted Wireless Signal Repeater**



**ATC65-W-R**



**ATC63-R**

## **AARC-EVAC™ Outdoor Solar Powered Pole Mount Standalone Wireless Signal Repeater**

AARC-EVAC™ outdoor solar powered pole mounted standalone wireless signal repeaters. They are totally standalone with in-built solar charged battery/UPS

These repeaters are primarily designed to extend the wireless signal range over long distances ie between school buildings and to school oval or from mine site offices to the working mine.

They can be used in high building density areas where signal strength can sometimes be compromised

All valid signal message received by a repeater unit is immediately re-transmitted

**\*ATC63-R**

### **AARC Outdoor Solar Powered Standalone Pole Mounted Wireless Signal Repeater**

## **AARC-EVAC™ Indoor Wall Mount Standalone Wireless Repeater**

AARC-EVAC™ indoor wall mount wireless linked emergency alert signal repeaters incorporate a in-built UPS and are a fully self-contained wireless signal repeater only.

These repeaters are used to extend the wireless signal range over long distances or in high density area of the site where signal strength can sometimes be compromised

Any valid system signal messages received by the repeater units are immediately re-transmitter

**\*ATC62-R**

### **AARC Indoor Wall Mount Repeater Inc UPS**



**ATC62-R**

## **AARC-EVAC™ Indoor Standalone Received Unit with Flashing Beacons Only**

The AARC-EVAC™ Indoor Standalone Receiver Unit with Flashing Beacons Only incorporates a built in UPS and is fully self contained.

This can be used in areas where a siren/message play unit may not be required ie in areas where a OVA threat may exist and a siren/message player broadcast may escalate the situation, or in areas where hearing impaired persons may need to be alerted, or in areas where background noise levels are extreme and staff are wearing hearing protection ear muffs.

There are four different coloured individual beacons, each colour can be used to indicate the type of alert triggered.

There is also a version of this standalone beacon only unit that can incorporate a wireless signal repeater

**\*ATC43-FB**  
**AARC INDOOR RX FLASHING BEACON UNIT**

**\*ATC43-FB-R**  
**AARC INDOOR RX FLASHING BEACON UNIT W/ REPEATER**



## **AARC-EVAC™ Flashing Beacon Extension Unit**

The AARC-EVAC™ Flashing Beacon Extension Unit is an indoor/outdoor wall mount flashing beacon extension unit that can extend the flashing beacons on any standalone -FB unit that is already fitted with flashing beacons.

The flashing beacon umbilical unit comes with a 6 meter extension cable and easy fitting connection to the -FB units

**\*AARC-RB4-6**  
**AARC REMOTE BEACON x 4**  
**ON 6MTR UMBILICAL CABLE**





## **AARC-EVAC™ Outdoor Wall Mount Standalone Receiver/Message Broadcast Units**

AARC-EVAC™ Outdoor Standalone Wireless Linked Emergency Alert Siren & Message Broadcast Units. They incorporate an in-built UPS and are fully self-contained.

The Outdoor Wall Mount Units are supplied in an IP66 weatherproof enclosure. Power to keep the built-in UPS battery charged is supplied by 110-240VAC mains supply hardwired into the unit or a wall mounted solar panel.

When triggered the unit's Wireless Receiver activates standard emergency alert sirens, customisable audio messages. The unit has integrated audio amplifiers driving two, three or four external horn speakers supplied with the unit. The unit is designed to operate as a single unit or as part of a network of self-contained AARC-EVAC™ indoor and outdoor Standalone Wireless Linked Emergency Siren & Message Broadcast Units.

When operating the standalone unit as part of a network, different evacuation instructions and alert messages can be broadcast in different locations.

All units are also available with built-in wireless signal repeater if required (see the '-R' option).

**SMS Messaging Available:** All systems - whether a single receiver or a large network of receivers - have options available for sending SMS messages or being triggered by SMS messages.



### **Outdoor Wall Mount Units 110-240VAC Mains Powered**

Part Number	Number of Horn Speakers	Evac	Alert	Duress	First Aid	Lockdown	Signal Repeater
ARX82-W		✓	✓	✓	✓	✓	-
ARX83-W		✓	✓	✓	✓	✓	-
ARX84-W		✓	✓	✓	✓	✓	-
ARX82-W-R		✓	✓	✓	✓	✓	✓
ARX83-W-R		✓	✓	✓	✓	✓	✓
ARX84-W-R		✓	✓	✓	✓	✓	✓

### **Outdoor Wall Mount Units Solar Powered**

Part Number	Number of Horn Speakers	Evac	Alert	Duress	First Aid	Lockdown	Signal Repeater
ARX92-W		✓	✓	✓	✓	✓	-
ARX93-W		✓	✓	✓	✓	✓	-
ARX94-W		✓	✓	✓	✓	✓	-
ARX92-W-R		✓	✓	✓	✓	✓	✓
ARX93-W-R		✓	✓	✓	✓	✓	✓
ARX94-W-R		✓	✓	✓	✓	✓	✓

**AARC-EVAC™ Outdoor Wall Mount Standalone Receiver/Message Broadcast Units with Flashing Beacons**

AARC-EVAC™ Outdoor Standalone Wireless Linked Emergency Alert Siren & Message Broadcast Units with Flashing Beacons. They incorporate an in-built UPS and are fully self-contained.

The Outdoor Wall Mount Units are supplied in an IP66 weatherproof enclosure. Power to keep the built-in UPS battery charged is supplied by 110-240VAC mains supply hardwired into the unit or a wall mounted solar panel.

When triggered the unit's Wireless Receiver activates standard emergency alert sirens, customisable audio messages and the appropriate flashing beacon. The unit has integrated audio amplifiers driving two, three or four external horn speakers supplied with the unit. The unit is designed to operate as a single unit or as part of a network of self-contained AARC-EVAC™ indoor and outdoor Standalone Wireless Linked Emergency Siren & Message Broadcast Units.

When operating the standalone units as part of a network, different evacuation instructions and alert messages can be broadcast in different locations.

All units are also available with built-in wireless signal repeater if required (see the '-R' option).

**SMS Messaging Available:** All systems - whether a single receiver or a large network of receivers - have options available for sending SMS messages or being triggered by SMS messages.



**Outdoor Wall Mount Units with Flashing Beacons 110-240VAC Mains Powered**

Part Number	Number of Horn Speakers	Evac Beacon	Duress or Alert Beacon	First Aid Beacon	Lockdown Beacon	Signal Repeater
ARX82-W-FB	2	☀️	☀️	☀️	☀️	-
ARX83-W-FB	3	☀️	☀️	☀️	☀️	-
ARX84-W-FB	4	☀️	☀️	☀️	☀️	-
ARX82-W-FB-R	2	☀️	☀️	☀️	☀️	✅
ARX83-W-FB-R	3	☀️	☀️	☀️	☀️	✅
ARX84-W-FB-R	4	☀️	☀️	☀️	☀️	✅

**Outdoor Wall Mount Units with Flashing Beacons Solar Powered**

Part Number	Number of Horn Speakers	Evac Beacon	Duress or Alert Beacon	First Aid Beacon	Lockdown Beacon	Signal Repeater
ARX92-W-FB	2	☀️	☀️	☀️	☀️	-
ARX93-W-FB	3	☀️	☀️	☀️	☀️	-
ARX94-W-FB	4	☀️	☀️	☀️	☀️	-
ARX92-W-FB-R	2	☀️	☀️	☀️	☀️	✅
ARX93-W-FB-R	3	☀️	☀️	☀️	☀️	✅
ARX94-W-FB-R	4	☀️	☀️	☀️	☀️	✅

## **AARC-EVAC™ Outdoor Pole Mount Standalone Receiver/Message Broadcast Units 110-240VAC with and without Beacons**

AARC-EVAC™ Outdoor Standalone Wireless Linked Emergency Alert Siren & Message Broadcast Units with or without Flashing Beacons. They incorporate an in-built UPS and are fully self-contained.

The Outdoor Pole Mount Units are supplied in an IP66 weatherproof enclosure. Power to keep the built-in UPS battery charged is supplied by 110-240VAC mains supply hardwired into the unit. Brackets to pole mount, the receiver message player unit and speakers are provided.

When triggered the unit's Wireless Receiver activates standard emergency alert sirens, customisable audio messages and the appropriate flashing beacon where applicable. The unit has integrated audio amplifiers driving two, three or four external horn speakers supplied with the unit. The unit is designed to operate as a single unit or as part of a network of self-contained AARC-EVAC™ indoor and outdoor Standalone Wireless Linked Emergency Siren & Message Broadcast Units.

When operating the standalone units as part of a network, different evacuation instructions and alert messages can be broadcast in different locations.

All units are also available with built-in wireless signal repeater if required (see the '-R' option).

**SMS Messaging Available:** All systems - whether a single receiver or a large network of receivers - have options available for sending SMS messages or being triggered by SMS messages.



### **Outdoor Pole Mount Units 110-240VAC Power Input**

Part Number	Number of Horn Speakers	Evac	Alert	Duress	First Aid	Lockdown	Signal Repeater
ARX82		✓	✓	✓	✓	✓	-
ARX83		✓	✓	✓	✓	✓	-
ARX84		✓	✓	✓	✓	✓	-
ARX82-R		✓	✓	✓	✓	✓	✓
ARX83-R		✓	✓	✓	✓	✓	✓
ARX84-R		✓	✓	✓	✓	✓	✓

### **Outdoor Pole Mount Units 110-240VAC Power Input with Beacons**

Part Number	Number of Horn Speakers	Evac Beacon	Duress or Alert Beacon	First Aid Beacon	Lockdown Beacon	Signal Repeater
ARX82-FB						-
ARX83-FB						-
ARX84-FB						-
ARX82-FB-R						✓
ARX83-FB-R						✓
ARX84-FB-R						✓

**AARC-EVAC™ Outdoor Solar Powered Pole Mount Standalone Receiver/Message Broadcast Units with and without Beacons**

AARC-EVAC™ Outdoor Standalone Wireless Linked Emergency Alert Siren & Message Broadcast Units with or without Flashing Beacons. They incorporate an in-built UPS and are fully self-contained.

The Outdoor Solar Powered Pole Mount Units are supplied in an IP66 weatherproof enclosure. Power to keep the built-in UPS battery charged is supplied by a 20W solar panel. Brackets to pole mount the solar panel, the receiver unit and speakers are provided.

When triggered the unit's Wireless Receiver activates standard emergency alert sirens, customisable audio messages and the appropriate flashing beacon where applicable. The unit has integrated audio amplifiers driving two, three or four external horn speakers supplied with the unit. The unit is designed to operate as a single unit or as part of a network of self-contained AARC-EVAC™ indoor and outdoor Standalone Wireless Linked Emergency Siren & Message Broadcast Units.

When operating the standalone units as part of a network, different evacuation instructions and alert messages can be broadcast in different locations.

All units are also available with built-in wireless signal repeater if required (see the '-R' option).

**SMS Messaging Available:** All systems - whether a single receiver or a large network of receivers - have options available for sending SMS messages or being triggered by SMS messages.



**Outdoor Pole Mount Units Solar Powered**

Part Number	Number of Horn Speakers	Evac	Alert	Duress	First Aid	Lockdown	Signal Repeater
ARX92		✓	✓	✓	✓	✓	-
ARX93		✓	✓	✓	✓	✓	-
ARX94		✓	✓	✓	✓	✓	-
ARX92-R		✓	✓	✓	✓	✓	✓
ARX93-R		✓	✓	✓	✓	✓	✓
ARX94-R		✓	✓	✓	✓	✓	✓

**Outdoor Pole Mount Units Solar Powered with Flashing Beacons**

Part Number	Number of Horn Speakers	Evac Beacon	Duress or Alert Beacon	First Aid Beacon	Lockdown Beacon	Signal Repeater
ARX92-FB						-
ARX93-FB						-
ARX94-FB						-
ARX92-FB-R						✓
ARX93-FB-R						✓
ARX94-FB-R						✓

## AARC-EVAC™ Receiver/Message Broadcast Units for P.A. System Audio Input



ARX38D

The AARC-EVAC™ Wireless Linked Emergency Alert Receiver Message Broadcast Unit for P.A. Systems outputs standard Alert, Evacuation, Lock Down and Drill. It also plays multiple Duress, multiple First Aid, and Natural Disaster Warning, Alert sirens & messages when triggered by a remote wireless linked Alert Transmitter.

This P.A. system output unit also has an integrated set of push button switches which can trigger alerts so that any standalone units in the system can be triggered.



ARX38D

The unit also has a Cancel button which is used to cancel all siren and audio messages plus any visual alert flashing beacons deployed in the system.

It is recommended that an adequately sized UPS system is always employed to run this receiver/message broadcast unit and the P.A. system.

All available system alerts can be triggered by remote wireless alert transmitters. The rack mount unit has some alert buttons on the front panel for triggering system alert messages (see table below).

### Alert Button on Front Panel

**Factory Default Setting:** ALERT is programmed to play continuously until cancelled.

**Alternatively:** the unit can be factory set to sound ALERT for a preset time between 1–255 seconds, then if not cancelled the system will automatically switch over to a Full Evacuation.

**Note:** when operating a P.A. based system the same set of alert messages are applied across the whole P.A. system.

Part Number	Alert Button	Evac Button	Lockdown Button	Cancel Button	Evac Drill Button
ARX38D	✓	✓	✓	✓	✓

**Note:** This P.A. System output unit also stores and plays S.O.S. Duress Assist and First Aid Assist messages, triggered by remote wireless alert transmitters.

### AARC-EVAC™ External Interface Unit

The ATX45-EIU is a standard AARC-EVAC™ remote transmitter unit that is designed to transmit a trigger to the AARC-EVAC™ system. The EIU unit is designed to accept a dry momentary relay contact closure as an alarm trigger on the AARC-EVAC™ system.

Any one of the alerts, alarms or messages on the AARC-EVAC™ system can be configured to be triggered by an EIU unit.

#### Typical Application: Fire Panel Interface (Input from Fire Panel)

Typically when a Fire Panel is triggered by a heat or smoke detector, it will trigger an alarm. It will also provide a switched output signal from the Fire Panel.

The AARC-EVAC™ System will accept an EVACUATION trigger directly or, if required, an ALERT trigger from an ATX45-EIU.



ATX45-EIU  
External Interface Unit

**AARC-EVAC™ Safety Signs**

Evacuation and Nurse Call First Aid Assist signage is available in various sizes and is designed to enhance the visibility of the AARC-EVAC™ Remote Transmitter trigger button and call point locations.

Polyvinyl chloride (PVC) safety signs. 3mm thick.



**AARC-SS-EV/FA-A3**

First Aid - Nurse Call and Large Evacuation  
400 x 300 mm



**AARC-SS-FA-A3**

Large First Aid - Nurse Call  
300 x 400 mm



**AARC-SS-FA-A4**

First Aid - Nurse Call  
200 x 300 mm

**AARC-SS-EV-A4**

Evacuation  
200 x 300 mm

**AARC-EVAC™ Smart Protector Unit**



**AARC-SMARTPRO-R Unit**



**AARC-SMARTPRO-R Unit Open**

The AARC-EVAC™ Smart Protector Unit is designed to reduce nuisance activated alarm and alert calls.

When the cover is lifted, the unit emits a loud high pitched tone alarm to deter false alarms.

This Smart Protector Unit is commonly used in conjunction with the 3 second button press delayed trigger option available on the AARC-EVAC™ system to maximise its effectiveness.

This product is an electronic version of the "Break Glass Alarm Button".

## Case Study 1: Medium-to-Large Licensed Club

This licensed club venue caters for a broad range of activities, with gaming machine, restaurant, entertainment and function rooms. It attracts a large number of patrons on a daily basis and employs a large number of staff. It has a number of small PA systems servicing different areas within the venue.

There is no overall PA facility and some areas are not covered by a PA system at all. There is no automatic Evacuation system and no venue wide assistance call messaging facility. A range of risks were identified:


1. They identified the need for a venue wide automated Evacuation Alert system that could be operated independently from the existing PA systems.
2. As a licensed venue with 5 bars, gaming areas and a lobby/reception area, staff and patrons were likely to be at risk from time to time and although they employed security personnel they could not be everywhere all of the time. A Duress assistance call system or a radio paging system for security staff was identified as being needed.

The AARC-EVAC™ standalone receiver/message system was selected to address these needs for the following key reasons:

1. Multiple standalone receiver message Broadcast Units could be deployed throughout the venue to cover all areas to form one system.
2. The system being independent of the PA systems and with the emergency alert sirens and messages all pre-recorded and fully automated. There is no requirement for staff to make announcements over different PA's or to send radio pager messages to security staff asking for assistance.
3. The system's ability to easily and cost effectively provide Alert Panel/Remote Transmitters distributed strategically throughout the venue.
4. The system's ability to broadcast unique Duress messages calling for security to report to the different zoned locations across the venue. E.g. "Security to Piano Bar... Security to Piano Bar please".
5. The cost effectiveness of the system, with all system components being wireless/radio linked and preconfigured, installation time and cost were minimal and there would be little to no disruption to the venue operation during installation.



## Case Study 2: Small-to-Medium Sized Joinery Business with No Existing P.A. System

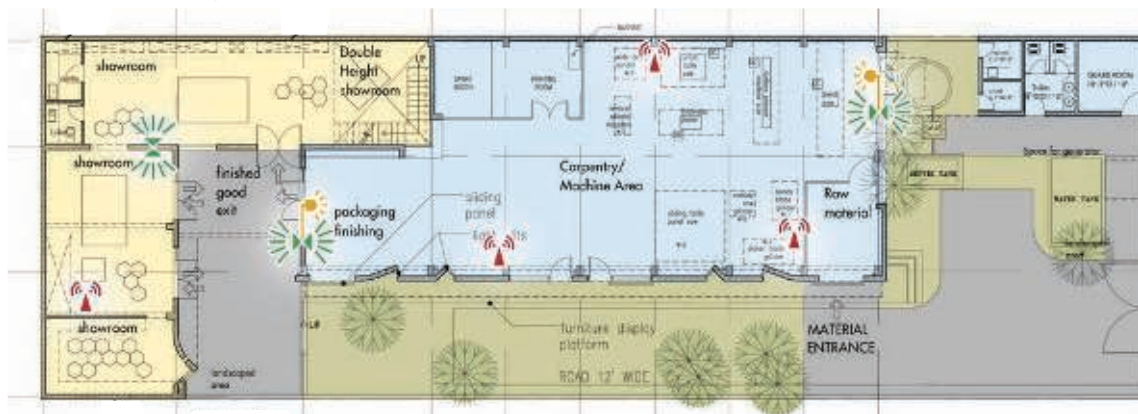

This joinery business employs a large range of woodworking machines and after an OH&S risk assessment, they identified a number of risks:

1. As the highest priority, they identified the need for the fastest possible response time in the event of any accident or injury that might occur within the factory.
2. As a high priority they identified that due to the use of electrically powered machinery and their extensive use of timber, the work place potentially has a heightened fire risk and needed an evacuation alert system.

The AARC-EVAC™ standalone system was selected to address these needs for the following reasons:

1. The system's ability to easily and cost effectively provide Alert Panel/Remote Transmitters that could be distributed throughout the factory.
2. The system's ability to broadcast unique First Aid Assist messages for different zoned locations within the factory.
3. The UPS battery back-up self-contained siren and message player units providing operation even with power out. (Machine overload, electrical motor stalling/jamming creates a fire risk and potentially the tripping of a circuit breaker, resulting in loss of mains power).
4. The ability of the system to provide visual flashing beacon alerts in a noisy workplace where employees all wear hearing protection devices.
5. As a wireless linked system, alert panel/remote transmitter placement provides for maximum flexibility, with no initial wiring and no re-wiring if in the future the alert panel/remote transmitters needs to be relocated.



Wireless Linked Emergency Broadcast Alert Systems

New Product Range :

Early Access



AARC-Live can extend the capabilities of the super reliable, AARC-EVAC, (Emergency Voice Alert Communication) system that plays clear, custom voice instructions (in any language) along with customizable alerts and sirens that are based on the emergency event that is triggered, to now include a **LIVE BROADCAST** option..

This option, **NOW PROVIDES**, the ability to **SPEAK** directly into the AARC-EVAC Emergency Alert System (EAS), in order to provide additional (on-the-spot) instructions for an even **SAFER** emergency alert system.

.....But this announcement doesn't just stop there.

Not only can you select the option to **BROADCAST** (send live audio to all wireless AARC-EVAC receivers), but also have the option to **MULTICAST** (send audio to pre-defined groups of wireless AARC-EVAC receivers) and you can select the option to **UNICAST** (send only to just one wireless AARC-EVAC receiver).

This is worth repeating, with the AARC LIVE option,

*"You can target individual wireless AARC-EVAC receivers to receive their own LIVE BROADCAST announcement."*

The details of this exciting new technology are so fresh that they couldn't make the printing deadline of this document. For more details of this technology and other upcoming product announcements, make sure that you check in on [aarcsystems.com.au](http://aarcsystems.com.au) on a regular basis.



International Award Winner

AARC-EVAC™ was honoured to be the recipient of the award for 'Best Product on Show' at the PNG Security Congress exhibition in Port Moresby 2019.



Email: [info@aarcsystems.com](mailto:info@aarcsystems.com)  
Phone: 03 5334 2865 Int Phone: +613 5334 2865  
Web: [www.aarcsystems.com.au](http://www.aarcsystems.com.au)



AARC-EVAC™

Designed & Manufactured in Australia

**Distributed By:**