

# Long Range Receivers & Transmitters

Cutting edge simplicity®

CANPROX WIRELESS RECEIVERS & TRANSMITTERS (433MHz)



## *Simple Secure Wireless*

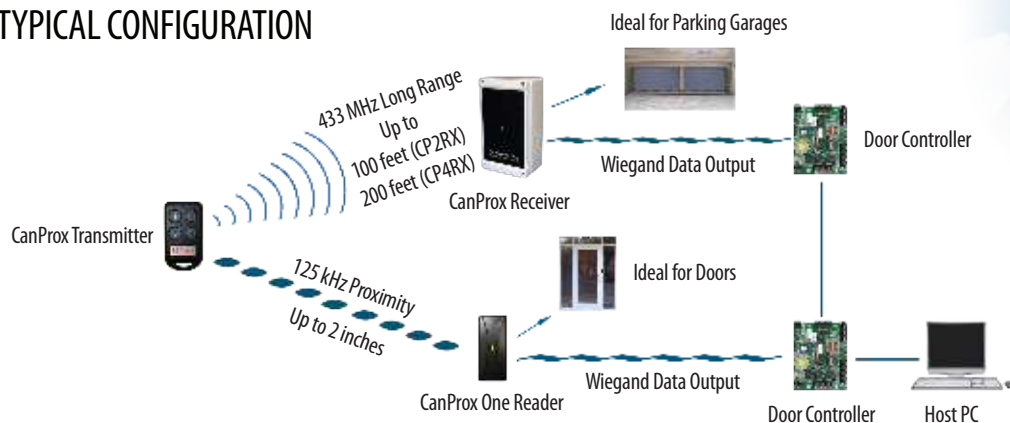
### FEATURES & BENEFITS



- CanProx wireless receivers are compatible with all access control systems
- Convenient 2-in-1 click-operated transmitter allows dual access control in a single device
- Long-range transmission is ideal for access from vehicles – no need to lower the window
- Ideal for a variety of applications including parking gates, lobby access and arming/disarming alarm systems
- Doubles as a short-range credential for most HID® and AWID® 125 kHz proximity readers
- Encrypted rolling code transmission guards against code grabbing and scanning
- Mounted on a key ring for easy handling

# Long Range Receivers & Transmitters

## CANPROX WIRELESS RECEIVERS & TRANSMITTERS (433 MHz)

### TYPICAL CONFIGURATION



SPECIFICATIONS		
Part Number	CA-CP2RX	CA-CP4RX
Description	Designed to output Transmitter data from buttons 1 and 2 over two separate Wiegand output lines.	Designed to output Transmitter data from buttons 1, 2, 3 and 4 over four separate Wiegand output lines.
Frequency	433 MHz	
Transmission	Rolling code + encryption	
Dimensions (HxWxD)	3.3 x 3.3 x 1.9 inches (84 x 84 x 46.9 mm)	6.3 x 3.4 x 2.3 inches (160 x 82.4 x 58.4 mm)
Weight	8 oz. (227g)	12 oz. (341g)
Voltage	12 VDC	
Current Draw	80 mA typical @ 12VDC	120 mA typical @ 12VDC
Read Range Operating	Up to 100 feet (30.5 m), non-adjustable	Up to 200 feet (61 m), installer adjustable
Interface	Wiegand (26-bit standard and 37-bit Cansec formats)	
Temperature	-40°C to +65°C (-40°F to 149°F)	
LEDs	External four-state standard (red, green, amber & off), Power (blue) and Channel (green)	Four-state standard (red, green, amber & off), installer switchable, as well as Power (blue) and Channel (green)
Audio Tone	Not Applicable	Beeper included standard, installer switchable
Transmitters Supported	CanProx 2-Button CanProx 4-Button (Button 1 & 2)	CanProx 2-Button CanProx 4-Button
Certifications	FCC, ICC, CE, ETL	
Warranty	1 year (Transmitter and Receiver)	

### CanProx Transmitter (2-Button)



AWID® 125 kHz Compatible  
CA-CP1TXFOB2-37A  
CA-CP1TXFOB2-26A

HID® 125 kHz Compatible  
CA-CP1TXFOB2-37H  
CA-CP1TXFOB2-26H

### CanProx Transmitter (4-Button)



AWID® 125 kHz Compatible  
CA-CP1TXFOB-37A  
CA-CP1TXFOB-26A

HID® 125 kHz Compatible  
CA-CP1TXFOB-37H  
CA-CP1TXFOB-26H

© 2010-2017 Cansec Systems Ltd. All rights reserved. Cansec®, CanProx®, and Cutting edge simplicity® are the registered trademarks of Cansec Systems Ltd. AWID is a registered trademark of Applied Wireless Identifications Group. HID, the HID logo, ProxCard, ISOProx, ProxKey, and MicroProx are registered trademarks of HID Global Corporation, an ASSA ABLOY company. All other trademarks are the property of their respective owner.