

CAMERA

TD-9584S3

8MP IR Water-proof Turret Network Camera



- 8MP (3840 × 2160) H.265 coding
- Max.resolution: 3840 × 2160
- ICR auto switch, true day / night, ROI coding
- 3D DNR, WDR, HLC, BLC, defog
- 20~30m IR night view distance
- DC12V/PoE power supply
- P2P function optional
- IP 67 ingress protection
- Support three streams
- Support mobile surveillance by smart phones with iOS or Android OS
- Intelligent analytics



en.tvt.net.cn

For more information, please visit our website

Shenzhen TVT DIGITAL TECHNOLOGY CO., LTD.

Address: 23rd Floor, Block B4, Building NO.9, Shenzhen Bay Eco-Technology Park, Nanshan District, Shenzhen, Guangdong Province, P.R.China

Tel: +86-755-36995888

Web site: <http://en.tvt.net.cn>

Fax: +86-755-33104777

E-mail: overseas@tvt.net.cn


SPECIFICATIONS

Model	TD-9584S3
Specifications	
Camera	
Image Sensor	1 / 2.7 "CMOS
Image Size	3840 × 2160
Electronic Shutter	1 s ~ 1 / 100000 s
Iris Type	Fixed Iris
Min. Illumination	0.11 lux @F2.2, AGC ON; 0 lux with IR 0.032 lux @ F1.2, AGC ON; 0 lux with IR
Lens	2.8 mm @F2.0, Horizontal FoV:112°; Vertical FoV:79°; Diagonal FoV:118.6° 3.6 mm @F2.2, Horizontal FoV: 89°; Vertical FoV:57.8°; Diagonal FoV:96.8°
Focus	Fixed
Lens Mount	M12
Wide Dynamic Range	Digital WDR
BLC	Yes
HLC	Yes
Defog	Yes
Digital NR	3D DNR
Angle Adjustment	Pan: 0°~360°; Tilt:0°~75°;Rotation: 0°~360°
Image	
Video Compression	H.265 / H.264
H.264 Compression Standard	Baseline Profile/Main Profile/High Profile
Resolution	8MP (3840 × 2160), 6MP (3072 × 2048), 5MP (2592 × 1944), 4MP (2592 × 1520), 2MP (1920 × 1080), 720P (1280 × 720), D1, CIF, 480 × 240
Main Stream	8MP/6MP/5MP/4MP/2MP(1~20fps)
Sub Stream	D1/CIF/480 × 240(1~20fps)
Third Stream	720P/D1/CIF(1~20fps)
Bit Rate	64 Kbps ~ 8 Mbps
Bit Rate Type	VBR / CBR
Audio Compression	G711A / U
Image Settings	ROI, Saturation, Brightness, Hue, Contrast, Wide Dynamic, Sharpness, NR, etc. adjustable through client software or web browser
ROI	Each ROI to be configured separately
Interfaces	
Network	RJ45
Video Output	No
Audio	1CH built-in MIC; 1CH audio input
Storage	Built-in micro SD card slot; up to 128GB
Reset	Yes
Functions	
Remote Monitoring	Web browsing, CMS remote control
Online Connection	Support simultaneous monitoring for up to 3 users; Support multi-stream real time transmission
Network Protocol	UDP, IPv4, IPv6, DHCP, NTP, RTSP, PPPoE, DDNS, SMTP, FTP, 802.1x, UPnP, HTTP, HTTPS, QoS
Interface Protocol	ONVIF
Storage	Network remote storage, micro SD card storage
Smart Alarm	Motion detection, SD card error, SD card full
Intelligent Analytics	Region intrusion detection, scene change detection and line crossing detection
General Function	Watermark, IP address filtering, video mask, heartbeat, illegal login lock
PoE	Yes
IR Distance	20~30 m
Ingress Protection	IP 67

Others

Power Supply	DC12V/PoE
Power Consumption	< 6W
Operating Environment	- 30 °C ~ 60 °C (-22°F~140°F) Humidity: less than 95 % (non-condensing)
Dimensions (mm)	Ø 94.6 × 82.8
Weight (net)	Approx. 0.47KG
Installation	Ceiling mounting (Wall mounting available with the junction box and bracket)
Certificate	CE, FCC
Environmental Protection	Complies with Directive EU RoHS, WEEE(2012/19/EU) , directive 94/62/EC and REACH(EC1907/2006)

DIMENSIONS

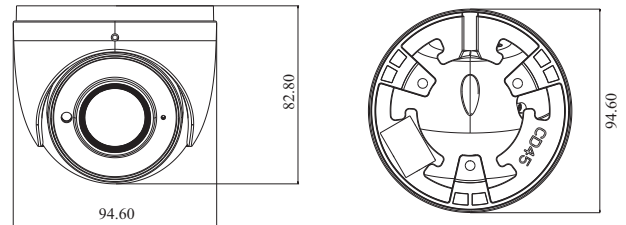

AVAILABLE ACCESSORIES



AVAILABLE MODEL

Available Model	TD-9584S3(D/PE/AR2)
-----------------	---------------------