



### DESCRIPTION

The JO-DA is a surface mount plastic color video door station. The JO-DV is an aluminum die cast surface mount color video door station. The JO-DVF is a stainless steel flush mount color video door station. All of these units work with the JO Series and connect to the master station or expansion station using an 18AWG 2-conductor solid core cable. Each unit includes a camera, microphone, speaker, and call button. Tamper resistant screws are provided for mounting the JO-DV and JO-DVF units.

All JO Series door stations are available as part of a kit including the JO-1MD master station.

When the call button on the door station is pushed, the inside stations ring and the video monitor comes on with the image from the door station's camera. The user at the inside station touches the "TALK" button to initiate communication. The person at the door station speaks hands-free.




### FEATURES

- Color video camera with audio intercom
- 2-way hands-free voice communication with JO master and expansion unit
- Call button to initiate call to master(s)
- White LED illuminator for low light conditions
- Simple 2-conductor wiring
- Surface (JO-DA, JO-DV) or flush mount (JO-DVF) styles available
- 330' wiring distance to Master on 18AWG 2-conductor cable (Aiphone wire #871802)
- JO-DA and JO-DVF not sold separately

# JO-DA/DV/DVF

## Camera Door Stations for the JO Series

### FEATURE CALL-OUT

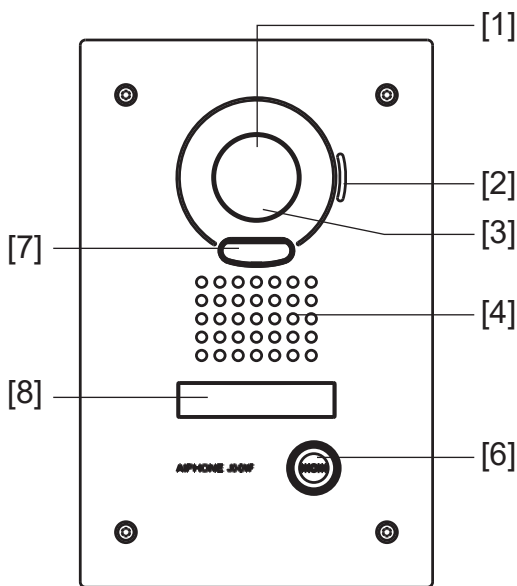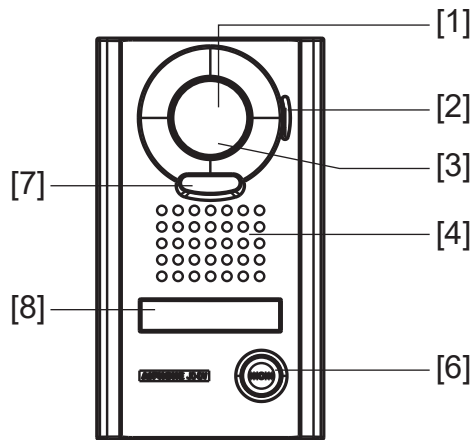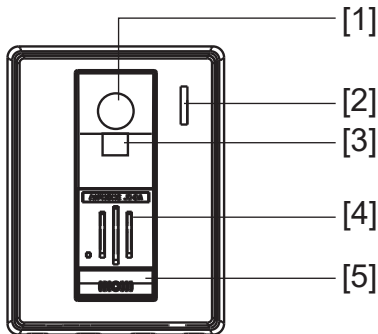

### FEATURE CALL-OUT DEFINITIONS

- [1] Camera
- [2] Microphone
- [3] Illumination sensor
- [4] Speaker
- [5] Call button with white LED
- [6] Call button
- [7] White LED
- [8] Directory Card

### SPECIFICATIONS

- Power Source: Supplied from JO Series Master
- Communication: Hands-free communication (auto-voice actuated or PTT) controlled by master station
- Camera: CMOS
- Min. illumination: 5 lux
- Wiring: 2-conductor, PE insulation, Aiphone wire #871802
- Wiring Distance: 330'
- Operation Temp: -40°~140° F (-40° ~ 60° C)
- Dimensions (HxWxD):
  - JO-DA 5-<sup>1</sup>/<sub>16</sub>" x 3-<sup>13</sup>/<sub>16</sub>" x 1-<sup>3</sup>/<sub>8</sub>" (129 x 97 x 35.5 mm)
  - JO-DV 6-<sup>13</sup>/<sub>16</sub>" x 3-<sup>7</sup>/<sub>8</sub>" x 1-<sup>1</sup>/<sub>16</sub>" (179 x 98 x 26.8 mm)
  - JO-DVF 8-<sup>1</sup>/<sub>4</sub>" x 5-<sup>5</sup>/<sub>16</sub>" (209 x 135 mm)
- Weight: (approx)
  - JO-DA: 0.44lbs (200g)
  - JO-DV: 1.43lbs (650g)
  - JO-DVF: 1.27lbs (580g)