

SBX-GTDMB

Stainless Steel Surface Mount Box for GT-DMB-N

-INSTRUCTIONS-

The SBX-GTDMB is a stainless steel enclosure designed for surface mounting the GT-DMB-N All-in-One entry panel.

CONTENTS:

- SBX-GTDMB surface mount box
- Qty 4. M4 Speed Nuts


MOUNTING INSTRUCTIONS:

1. The SBX-GTDMB is designed to mount to a 1 or 2-gang box/ring or to any flat surface.
2. Pass cable through the knockout hole. A $\frac{7}{8}$ " conduit knockout is provided for running conduit directly to the bottom of the unit.
3. Secure mounting box to wall.
4. Connect wires to GT-DMB-N entry station. (Refer to GT system's installation instructions).
5. Connect supplied speed nuts to mounting tabs. (4 total)
6. Attach entry station to mounting box using the screws that are supplied with the intercom station.

SPECIFICATIONS:

Mounting:	1 or 2-gang box, or surface mount directly to wall
Material:	Stainless steel. 18-gauge (box), 16-gauge (hood)
Color:	Polished Stainless Steel
Dimensions (HxWxD):	12- $\frac{11}{16}$ " x 6- $\frac{1}{16}$ " x 2- $\frac{1}{2}$ " (top); 2" (bottom)
Interior depth:	1- $\frac{3}{4}$ "

SBX-GTDMB

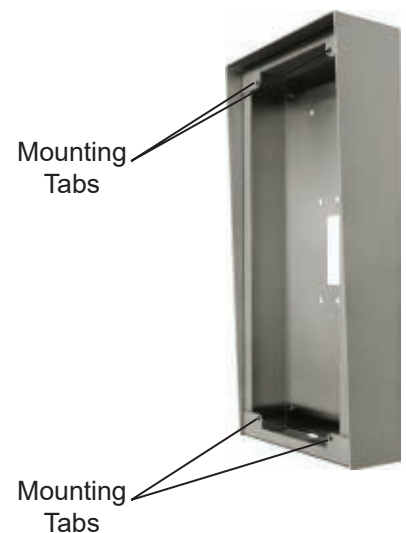

GT-DMB-N

